



LIGHT UP YOUR IDEAS

OCTALUMINA® 40 WITHOUT SYSTEM GROOVE



HIGH LUMINOSITY · NO SHADOWS





LIGHT UP YOUR IDEAS

OCTALUMINA® 40 WITHOUT SYSTEM GROOVE

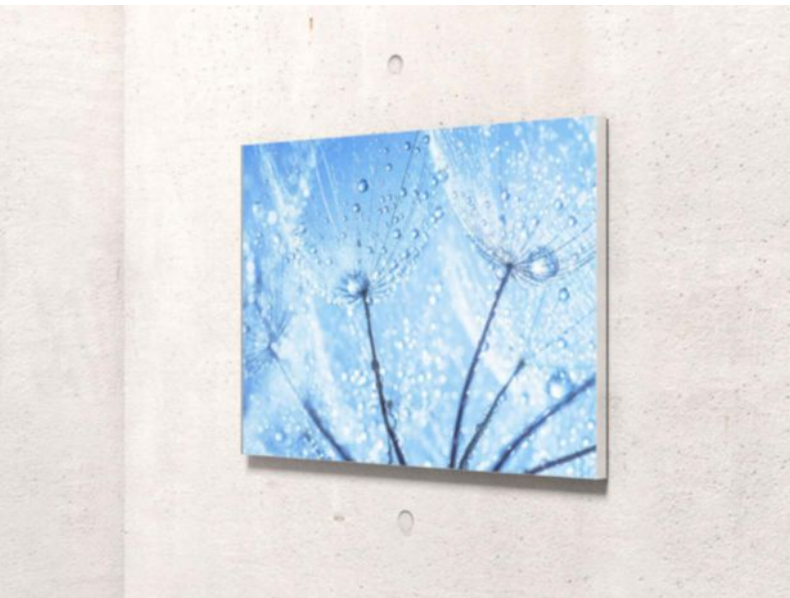

EXTRUSION
M 1930



LED SYSTEM



100-240 V AC



DIMMABLE



CE-CERTIFICATE



PLUG & PLAY

IDEAL FOR WALL AND CEILING

Our OCTALUMINA® 40 light frames without system groove are available in the standard dimensions DIN A0 and DIN A1 and are perfect for wall illumination.

The high amount of LED modules with special lenses mounted to the back wall ensure high brightness for the OCTALUMINA® 40 frames.

Due to the well thought-out combination of LED modules with three or six LED elements respectively, a shadow free and consistent illumination is guaranteed – at a profile depth of only 40 mm.

**Non-standard dimensions
available on demand**

ITEM NO.	DIMENSIONS (W × H)
OL 400	DIN A0 1189 × 841 mm
OL 401	DIN A1 841 × 594 mm

PRODUCT HIGHLIGHTS

- high brightness
- shadow free illumination
- thin frame
- ready to use

TECHNICAL DETAILS

- frame material: aluminium, matt anodized
- front: backlight fabric with silicone edge *
- back: aluminium sandwich panel, 3 mm
- extrusion depth: 40 mm, without system groove
- lighting method: back-lit
- OL 400: 8750 lumen, 112 W; OL 401: 4375 lumen, 56 W
- 24 V, incl. power supply unit
- light color: 6000 Kelvin (daylight white)
- dimmer also available

USE

- wall and ceiling for retail, interior design, presentation, and exhibitions

* not included